



Hinge 106° 1-7/16" OL, Dowels, 2 Cam

Part Number: SCSR3D99N

Salice Hinge 106° 1-7/16" OL, Dowels, 2 Cam

<div>
</div>

Adjustment Type	2-Way Cam Adjust
Angle	106
Application Type	Face Frame
Closing Type	Self-Close
Door Type	Face Frame
Finish	Nickel
Hinge Cup Depth	11
Hinge Door Thickness	Up to 3/4" Thick
Mounting Type	Dowels
Overlay	1-7/16 in

Product Description


Salice Excentra Face Frame hinges enable easy and simple installation while combined with their superior technical features ensuring that you receive a reliable and consistent door action. These low-profile, one-piece face frame hinges provide eccentric cams for two way adjustments, including side-to-side and in-and-out, providing you with perfect alignment. Available in both screw-on and doweled versions, they will enable long-lasting attachment to the frame with superior stability and zero door protrusion. Expect a lifetime of smooth opening and closing in your kitchen when you pick Salice.

Product Advantages

- · Salice provides a lifetime warranty
- Precise door alignment
- Zero door protrusion
- Boring pattern same as the industry standard




Technical Documents





Printed on: 2024-May-02


Technical Documents





Printed on: 2024-May-02

Technical Documents

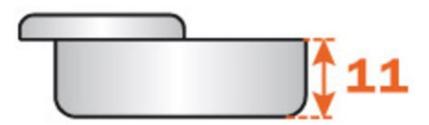



Technical Documents








111

hinges automatic closing / face frame hinge / standard applications

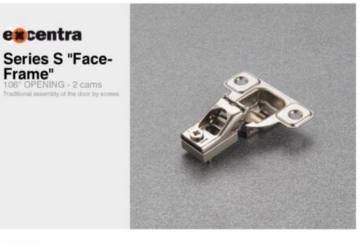

Stamped steel. Cup depth 11 mm (7/16'). Opening 106' degrees. Drilling distance (K) fixed at 2.5 mm (3/32'). Gap between door and frame (L) = 4.6 mm.

For overlays from 1/4"through 3/4" the "A" value (Reveal) = 8.3 mm for (21/64") square edge doors at 90° opening.

For overlays from 1" through 1-7/16" the "A" value (Reveal) = $5.2~{\rm mm}$ for (3/4") square edge doors at 90" opening.

